

Spirit-NOPA®

**Broadly Tunable Optical Parametric Amplifiers
for 3-Photon Imaging in Neuroscience and
Other Ultrafast Scientific Applications**



The Spirit-NOPA is a family of automated non-collinear optical parametric amplifiers (NOPA) specifically built and optimized for the industry-proven Spirit® HE and Spirit® One™ ultrafast lasers. The turn-key, high repetition rate Spirit femtosecond laser combines with the Spirit-NOPA to create a powerful, user-friendly tunable, high repetition rate source of ultrashort pulses for in-vivo, deep tissue imaging in neuroscience, spectroscopy, and other ultrafast scientific applications.

Spirit-NOPA-VISIR delivering unprecedented performance for 3-photon imaging:

In combination with our industry-proven Spirit platform, the Spirit-NOPA-VISIR provides an ideal platform for 3-photon excitation microscopy. Spirit-NOPA-VISIR

comprises two amplification stages. The first amplification stage is non-collinear, which generates broad bandwidth, and the second amplification stage is collinear, which enables a broad tuning range.

Spirit-NOPA-VISIR provides a broadly tunable output of ultrashort pulses with a tuning range of 650 nm to 900 nm (signal) and 1200 nm to 2500 nm (idler), including key wavelengths for deep-tissue, 3-photon imaging. Optionally, the signal output can be compressed down to <70 fs using an external prism-based compressor unit, and the idler output down to <100 fs, using an integrated bulk compressor.

Spirit-NOPA Advantage

Spirit-NOPA-VISIR:

- High pulse energy for 3-photon imaging
- Broad tuning range: 650 nm to 900 nm (signal), 1200 nm to 2500 nm (idler)
- Optional pulse compression: <70 fs (signal), <100 fs (idler)
- Dual pulse length option to bridge the gap in the tuning range

Spirit-NOPA (-2H and -3H):

- High repetition rate, ultrashort pulses
- Wavelength range from UV to near-IR
- Integrated pulse compressor

Applications

- 3-photon excitation microscopy
- Single molecules studies
- Nanomaterials science
- Ultrafast surface dynamics
- Multi-dimensional spectroscopy



The Spirit-NOPA-VISIR is fully computer controlled to enable user-friendly operation. To cover 2P excitation imaging and applications in optogenetics as well, the Spirit-NOPA-VISIR can be configured with a dual pulse length option. With this option, narrow bandwidth, uncompressed laser pulses are available over an extended tuning range of the Spirit-NOPA-VISIR, closing the gap between signal and idler. The dual pulse length option is ideally suited for photostimulation of neurons in optogenetics and excitation of fluorescent dyes in the 900 nm to 1200 nm spectral range.

Spirit-NOPA-3H, and Spirit-NOPA-2H for ultrashort pulses from UV to near-IR:


Spirit-NOPA-3H includes a built-in third harmonic generator and its output is tunable from 520 nm to 900 nm with a pulse width as short as sub-30 fs and an output energy up to $>0.5 \mu\text{J}$.

Spirit-NOPA-2H includes a built-in second harmonic generator, to convert the Spirit IR beam to 520 nm. The output of the Spirit-NOPA-2H is tunable from 650 nm to 900 nm with a pulse width as short as sub-30 fs and an output energy up to $>3 \mu\text{J}$.

Spirit-NOPA (-3H, -2H) is fully computer controlled to allow for easy wavelength tunability. Its built-in bandwidth selector and integrated computer controlled compressor provide a pulse width agility unmatched by other ultrafast laser technologies.

Typical Spirit-NOPA-VISIR Performance¹


(Pump by a Spirit HE 1040-30 at 30 W and 1 MHz, Compressed Output)

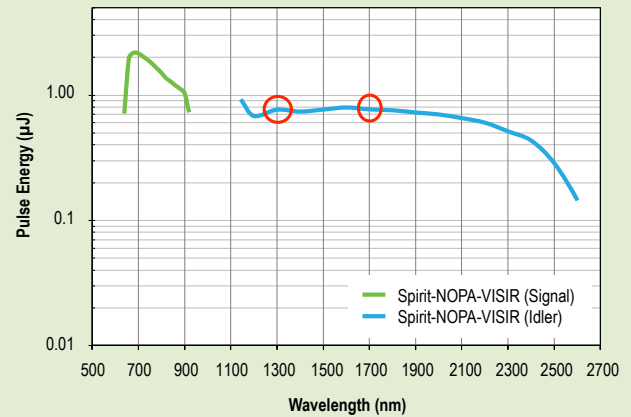

1. Typically measured performance; not a guaranteed or warranted specification.

Typical Spirit-NOPA Performance¹

(Spirit pump pulse energy $40 \mu\text{J}$, Compressed Output)

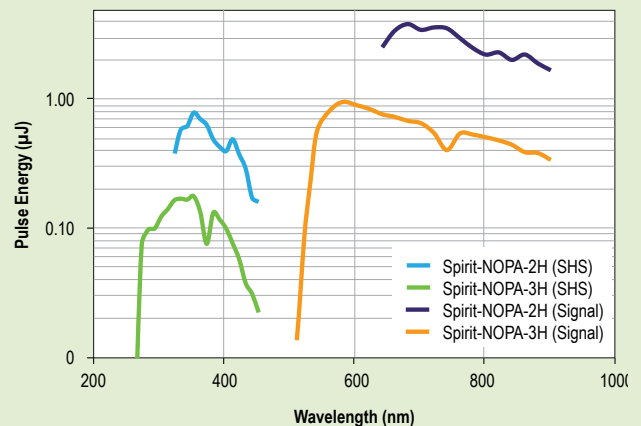

1. Typically measured performance; not a guaranteed or warranted specification.

Spirit-NOPA Specifications^{1, 5}

	Spirit-NOPA-3H	Spirit-NOPA-2H
Output Specifications		
Tuning Range	520–900 nm	650–900 nm
Pulse Energy ²	0.5 μ J at 580 nm (peak); 0.25 μ J at 700 nm	3 μ J at 700 nm (peak); 1.2 μ J at 850 nm
Pulse Width	<30 fs at 530–670 nm; <80 fs at 670–800 nm	<30 fs at 700–850 nm
Optional SHG Output		
Tuning Range	260–450 nm	325–450 nm
Pulse Energy ²	0.05 μ J at 290 nm (peak)	0.3 μ J at 350 nm (peak)
Pump Requirements⁴ from Spirit		
Repetition Rate	Single shot to 1 MHz	
Wavelength	1030 nm or 1040 nm	
Pulse Energy	12–120 μ J	10–120 μ J
Max. Input Power	8 W	8 W

	Spirit-NOPA-VISIR
Output Specifications	
Tuning Range	650–900 nm (signal) 1200–2500 nm (idler)
Conversion Efficiency	>10% at peak, when pumped at >20 μ J (uncompressed signal + idler combined)
Pulse Width ³	<350 fs uncompressed ² <70 fs at 650–900 nm with signal compressor; <100 fs at 1200–2000 nm with idler compressor
Compressor Transmission	Signal prism compressor: >65% at 650–900 nm Idler bulk compressor: >80% at 1200–2000 nm
Optional SHG Output	
Tuning Range	325–450 nm (SH of signal) 600–700 nm (SH of idler)
Pulse Energy ²	>10% of signal/idler at peak
Optional Dual Pulse Length Configuration	
Tuning Range in Long Pulse Mode	650–1025 nm (signal) 1040–2500 nm (idler) Uncompressed output

1. Due to our continuous product improvement program, specifications are subject to change without notice.


2. When pumped with 40 μ J at 1040 nm. For other pump levels, please contact Spectra-Physics.

3. Compressors for signal and/or idler are options.


4. Spirit-NOPA pump parameters are determined at the time of order and are set at the factory.

5. The Spirit-NOPA is a Class IV – High Power Laser, whose beam is, by definition, a safety and fire hazard. Take precautions to prevent exposure to the direct and reflected beams. Diffuse as well as specular reflections can cause severe skin or eye damage.


Spirit-NOPA-3H, -2H Dimensions




End View

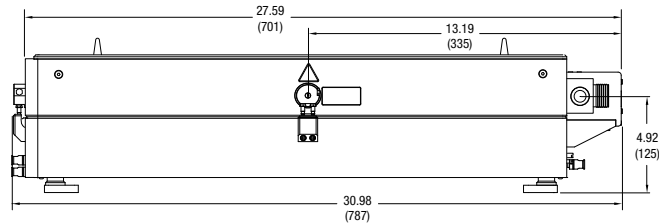

Side View




End View

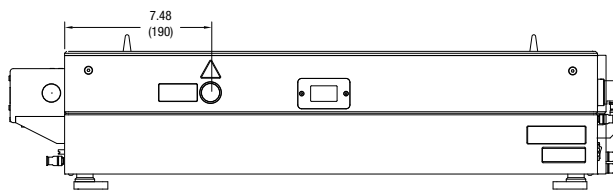


Side View

Dimensions in inch (mm)


Spirit-NOPA-VISIR Dimensions

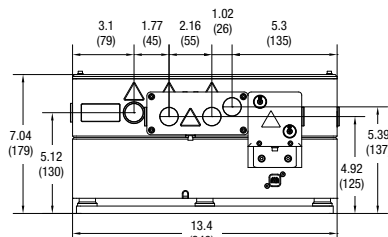


End View

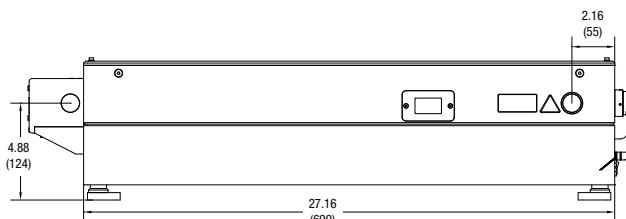

Side View



End View

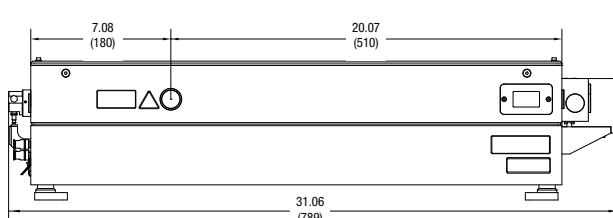

Side View

Dimensions in inch (mm)